



## Wet base kit shower tray installation instructions | Concrete Floor


---

After placing an order for one of shower trays for wet room in our offer you will receive foam based XPS with 2% fall prepared during manufacturing process from every corner of the tray to every corner of the drain, with integrated waterproof stainless steel channel. Shower tray is reinforced with fibre glass mesh and cemental glue layer. Drain is built in during production process, waterproofed, suitable grate and McAlpine siphon trap included.


Drain goes 15 mm above the shower tray and approximately 50 mm below the bottom surface. Upper surface is slope while bottom is even. The thicker shower tray, the more noticeable fall is. Depending on your existing floor board thickness (usually 20 mm) and future wet room layout you need to decide which thickness is right for you. It requires underboarding with at least 20 mm thick marine ply, which can sit between the joists, so if your floor board is 20 mm thick, shower tray of that thickness will mean that there's no floor height increase.

Tanking kit can be included to your wet room kit to receive additional package with insulation materials. Each tanking kit covers 3.2 square metres and contains useful materials to make your shower and splash area waterproof, which is highly recommended. Additional sealing materials can bought from our Construction chemicals category. In depth guide is available on DIY insulation guide page.


Showerlay drain itself is waterproof but the joists, connections between floor board and shower tray and rest of the room require tanking. Waterproofing entire shower room is optional, however tanking shower area and splash area is mandaty and should be always undertaken prior to installation.

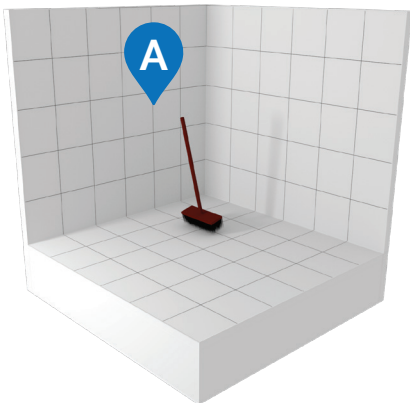


**A** Prepare floor and walls and clean it from dust, debris. Remove garbage and make sure you have sufficient space for comfortable work. Prepare materials and tools necessary to complete the installation, you will probably need a level, chisel & hammer or jackhammer, pencil, measuring tape, brush, notched trowel, tile adhesive. Handsaw can be used to trim the shower tray to trim to size, but equal distances from both sides should be cut to preserve proper fall towards the drain.

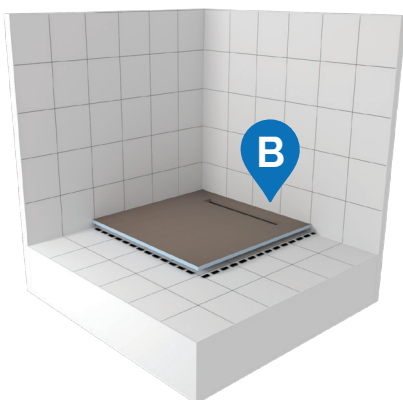


**B** Establish future shower area by placing the shower tray on top of existing screeded floor. Make sure shower tray is sits tightly in the corner. Use pencil to draw perimeter around board and inside to drain outlet to mark the position of the tray and waste. In case of upcoming screed, shutter off the future shower tray position and leave sufficient space to make it flush with rest of the floor.

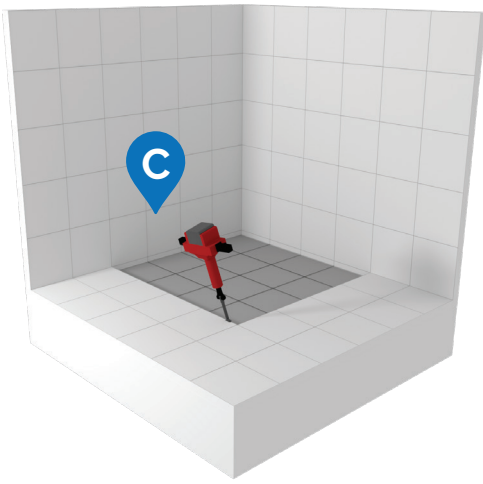


**C** Remove existing concrete layer as thick as Showerlay using a chisel and hammer or jackhammer. Grind a square or rectangle matching previously drawn Showerlay shape. Identify future position of waste approximately 65 mm below the concrete surface and pipework.

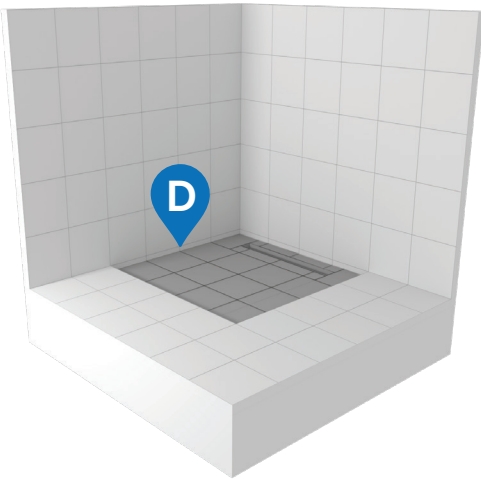


**D** Find the best possible drain position and angle to connect it to your pipe work. Siphon trap can be rotated in 360° and waste pipe's height can be adjusted, giving much flexibility for proper positioning. Ensure the siphon trap is supported below with concrete. If created hole is too deep build up support with cement.

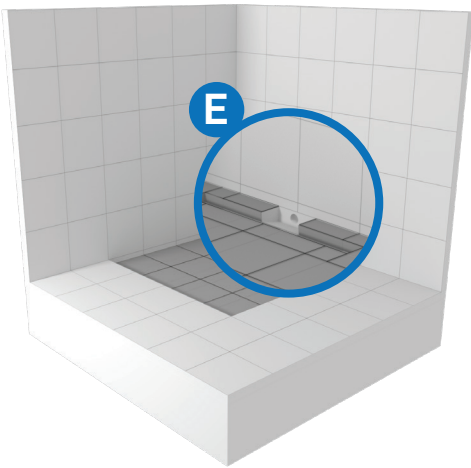


**E** Connect a standard 50 mm compression pipe into the end of the siphon trap. Ensure you will be able to assemble the siphon trap with upper fixing part from above of the steel drain channel and black rubber seal below. If you are sure that the siphon trap is well supported in correct place use silicone sealing adhesive to fix the siphon trap's pipe to your waste system. Now perform a simple test if water flows correctly by pouring water into the siphon.

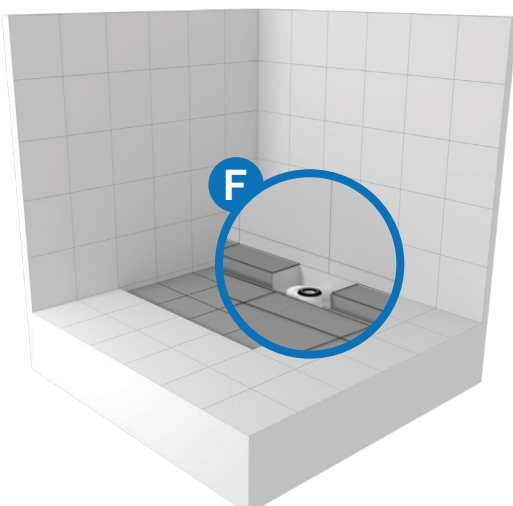

**F** Clear prepared slot in concrete from dust and debris to allow fixing adhesive work below entire tray surface. It requires solid and even support, so if your concrete has a lot of holes and is uneven, use the floor leveler compound for concrete to lay a thin fixing surface, it also gives floor flexibility to move without micro cracks in screed. Use a bubble level to verify prepared support.

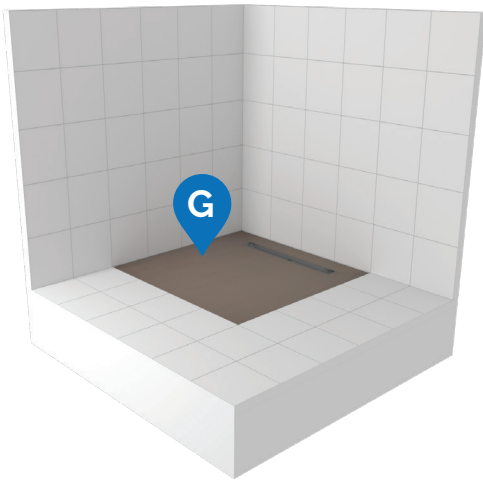

**G** Put the Showerlay down to check if it sits in correct position and if it's flushed with rest of the floor. Check if you are able to connect the siphon upper part with waste trap underneath the shower tray and if it sits on previously prepared support. Use the level to check if the tray is even and if the drain channel is the lowest place in the shower area. Test if the linear drain channel matches the hole in ply support.

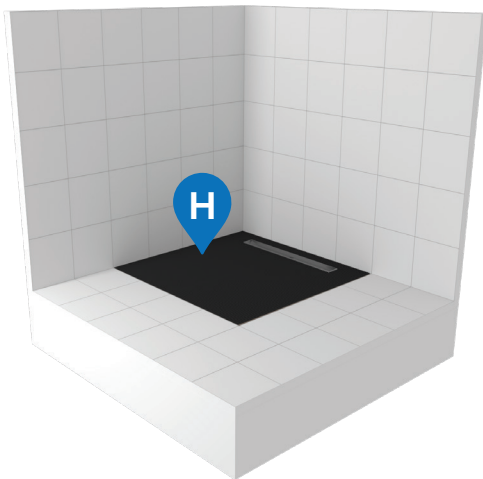

**H** Apply 0.5 - 1 mm standard tile fixing adhesive over the created support using notched trowel. Ensure the adhesive layer is even over the entire area. Stick the wet room kit to the concrete slot and assemble the channel drain with the siphon trap below. Use silicone to seal the white part of siphon which is used to be screwed down the trap from above and fix to the channel. Make sure everything is well supported and sits in correct position. Wet room should now be flushed with remaining area of the room.



**I** Distance from the shower tray surface to the top edge of vertical drain frame is 15 mm, so if you need to build up that space, use tile backer boards. They are perfect material to tile over and should be used as well over the rest of the floor. Waterproof the connections between boards and also floor/wall connections using tanking liquid and waterproof tape contained in waterproofing kit. Apply sealing corners and pipe collars where necessary. Liquid foil can be used as adhesive to stick these.



# Wetroomstop

Contact us:  
[www.wetroomstop.com](http://www.wetroomstop.com)

Email:  
[info@wetroomstop.com](mailto:info@wetroomstop.com)